




Product Features


- Medical & I.T.E. safety approvals
- 2 MOPP input to output isolation
- Touch current $\leq 100\mu\text{A}$
- Earth Leakage current $\leq 5\text{mA}$
- Energy efficiency level VI
- $\leq 0.15\text{W}$ standby power
- 9V-54V outputs, up to 65W
- Up to 5,000m operating altitude
- 4 types of AC inlet

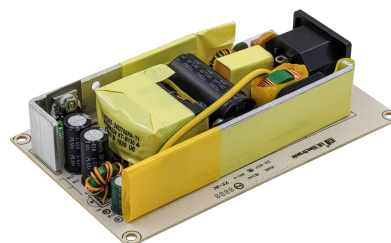

Models & Parameters

Model Number	Voltage ^(*) (V)	Current (A)	Rated Power	Ripple & Noise (max)	Voltage Tolerance	Line & Load Regulation	Efficiency (Average)	Start Up Delay
UES65-XXXXXXSPAZ UES65-XXXXXXSPA2-OP	9.0-12.0	0.01-5.42	65.04W	200mVpk-pk	$\pm 5\%$	Line: $\pm 1\%$ Load: $\pm 5\%$	89.00%	$\leq 3\text{s}$
	12.1-13.0	0.01-5.00	65.00W	200mVpk-pk	$\pm 5\%$		89.00%	$\leq 3\text{s}$
	13.1-14.0	0.01-4.64	64.96W	200mVpk-pk	$\pm 5\%$		89.00%	$\leq 3\text{s}$
	14.1-15.0	0.01-4.30	64.50W	200mVpk-pk	$\pm 5\%$		89.00%	$\leq 3\text{s}$
	15.1-16.0	0.01-4.06	64.96W	200mVpk-pk	$\pm 5\%$		89.00%	$\leq 3\text{s}$
	16.1-17.0	0.01-3.82	64.94W	200mVpk-pk	$\pm 5\%$		89.00%	$\leq 3\text{s}$
	17.1-18.0	0.01-3.60	64.80W	200mVpk-pk	$\pm 5\%$		89.00%	$\leq 3\text{s}$
	18.1-19.0	0.01-3.40	64.60W	200mVpk-pk	$\pm 5\%$		89.00%	$\leq 3\text{s}$
	19.1-20.0	0.01-3.24	64.80W	200mVpk-pk	$\pm 5\%$		89.00%	$\leq 3\text{s}$
	20.1-21.0	0.01-3.09	64.89W	200mVpk-pk	$\pm 5\%$		89.00%	$\leq 3\text{s}$
	21.1-22.0	0.01-2.95	64.90W	200mVpk-pk	$\pm 5\%$		89.00%	$\leq 3\text{s}$
	22.1-23.0	0.01-2.82	64.86W	200mVpk-pk	$\pm 5\%$		89.00%	$\leq 3\text{s}$
	23.1-24.0	0.01-2.70	64.80W	240mVpk-pk	$\pm 5\%$		89.00%	$\leq 3\text{s}$
	48.0	0.01-1.35	64.80W	300mVpk-pk	$\pm 5\%$		89.00%	$\leq 3\text{s}$
	48.1-54.0	0.01-1.20	64.80W	300mVpk-pk	$\pm 5\%$		89.00%	$\leq 3\text{s}$

Mechanical Details

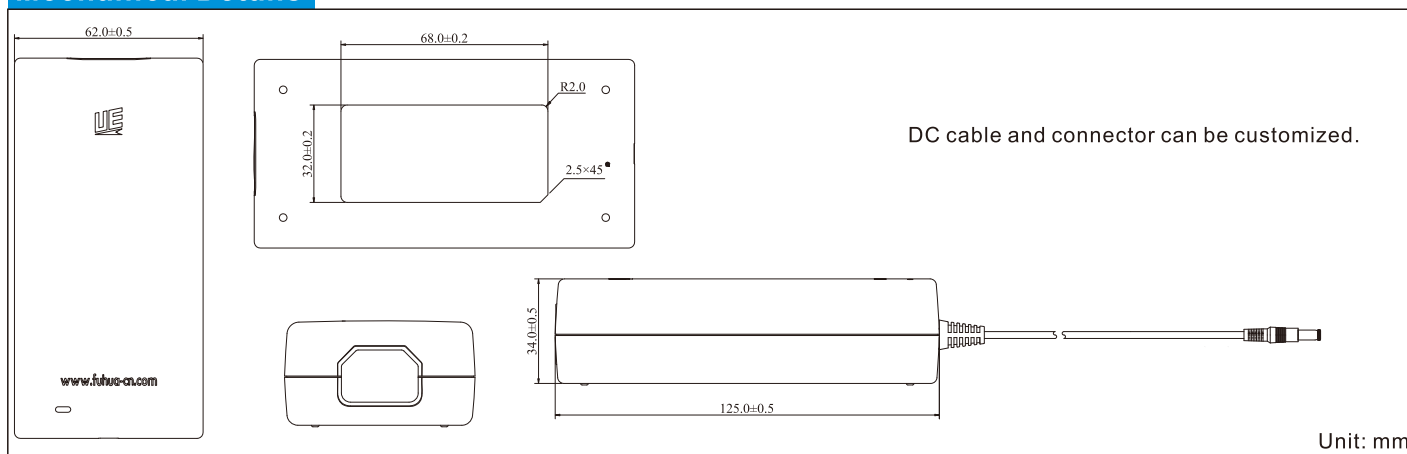


AC Inlet Options




C8 (SPA1)



C6 (SPA2)



C14 (SPA3)



C18 (SPA4)

Notes

(*) Other options are available, please contact our sales representative for details.

Input

Input Voltage Range	90-264VAC (Class I); 80-264VAC (Class II)
Frequency Range	47-63Hz
Input Current	2.0A at 80/90VAC
Inrush Current	120A max at 240VAC cold start
Touch Leakage Current ^(max)	≤ 100μA at 264VAC

Environmental

Operating Temperature	0°C to 40°C
Storage Temperature	-20°C to 60°C
Operating Humidity	10% to 90% RH, non-condensing
Storage Humidity	5% to 90% RH
Operating Altitude	5,000m

General

Dimensions	125(L) 62(W) 34(H)mm
Weight	315g
MTBF	>100,000hrs MIL-HDBK-217 at 25°C

Protection

Overload	120-200% rated output power, auto recovery
Over Voltage	120-200% rated output voltage input to reset
Short Circuit	Trip and restart (hiccup mode)

Safety Approvals

Safety Agency / Mark	Medical	ITE
CB	IEC60601-1 IEC60601-1-11	IEC60950-1 IEC62368-1
UL	ANSI/AAMI ES60601-1 CAN/CSA C22.2 NO. 60601-1	UL60950-1 UL62368-1
TUV Rheinland/Mark	EN60601-1 EN60601-1-11	-
TUV Rheinland/GS	-	EN62368-1
CCC	-	GB4943.1
CE	-	EN62368
FCC	-	FCC PART 15
PSE	-	J60950
BIS	-	IEC60950-1
BSMI	-	CNS14336-1
EAC	-	IEC62368-1
NOM	-	NOM-001-SCFI-2018
PSB	-	IEC62368-1
IRAM	-	IEC62368-1
RCM	-	AS/NZS62368-1
ST	-	IEC62368-1

EMC

Emission	Medical	ITE
Conduction	IEC/EN60601-1-2, CISPR 11	EN55032, CISPR 32
Radiation	IEC/EN60601-1-2, CISPR 11	EN55032, CISPR 32
Harmonic Currents	EN61000-3-2, Class A	EN61000-3-2, Class A
Voltage Flicker	EN61000-3-3	EN61000-3-3
Immunity	IEC/EN60601-1-2	EN55024, CISPR 24
ESD	IEC61000-4-2	±15KV air, ±8KV contact
Radiated Immunity	IEC61000-4-3	10V/m, 3V/m 80MHz-2.7GMHz
EFT/Burst	IEC61000-4-4	±2KV on AC port, ±1KV on signal ports
Surge	IEC61000-4-5	±2KV line to line (different mode)
Conducted Immunity	IEC61000-4-6	3Vrms, 6Vrms (015MHz-80MHz)
Magnetic Field	IEC61000-4-8	30 A/m
Dips & Interruptions	IEC61000-4-11	0%, 70%, 0% of UT

Others

Dielectric Withstand Voltage	2,121VDC for Class I / 5,656VDC for Class II input to output
Insulation Resistance	10M Ohms, 500VDC input to output